

VISIX™ 6MP Vertical 360° Infrared Hemispheric IP Camera

This six (6) megapixel 360° IP camera provides affordable, high-definition 100% coverage with the ability to pan, tilt and zoom (PTZ) to any location. The VX-6M-360-IA is ideal for low or no light environments, and requires no blind spot monitoring. Displaying up to 3072 x 2048 pixels, this vandal-resistant network dome camera is designed to integrate seamlessly with the full family of VIGIL Video Management System (VMS) software modules including X-VIEW Panoramic De-warping Software.

X-VIEW Panoramic De-warping Software allows users to achieve real-time viewing of an entire scene from a single camera. Users can simultaneously view a panoramic 360° image as well as three (3) distortion-corrected images on individual subset screens each supporting full-function digital PTZ capabilities. The flush-mount format allows for easy and secure installation in a wide variety of indoor applications.

The VX-6MP-360-IA is packed with features you might need for nearly any application including: motion detection, compatibility with a wide variety of standardized network protocols, built in microphone and speaker for two way voice.

In addition, this camera is designed to continue functioning at top performance at temperatures as low as -30°C (-22°F) and as high as 60°C (140°F) allowing a wide range of applications.

With one or four streams available in High Frame Rate Mode, and five streams in Multi-Channel mode, recording at the highest quality is available while allowing fast live viewing from anywhere in the world regardless of available bandwidth. In addition, with full support for both variable bit rate and variable frame rate, the quality of each stream can be matched to available bandwidth for the most effective video quality possible.

When coupled with the VIGIL™ Series of digital video recorders (DVR) and Video Management System (VMS) software, superior point-to-point hardware compression and decompression allows for maximum performance of streamed live video providing better video quality, more concurrent streams and a lower overall hit to CPU performance.



Key Features and Benefits	
Lens	1.27mm @F2.8
Resolution (Megapixels)	6
360° Field of View	✓
3072 x 2048 Resolution	✓
Infrared (Low-Light/No-Light)	✓
2-Way Audio	✓
H.264,MJPEG Compression	✓
25 fps (3072x2048), 30 fps (2048 x 2048)	✓
Digital Wide Dynamic Range	✓

CAMERA

Image Sensor:	1/1.8 inch Progressive Scan CMOS
Lens:	1.27mm @ F2.8 fish eye lens, 360 angle of view
Min. Illumination:	0.05 Lux @ (F1.2) Auto Gain Control on 0.3 Lux @ (F2.8) Auto Gain Control on 0 lux with IR
IR Range:	Up to 15 Meters
Angle of View:	360°
Day/Night:	ICR
Shutter Times:	1/25 seconds to 1/100,000 seconds

COMPRESSION STANDARD

Video Compression:	H.264, MJPEG
Video Bit Rate:	32 Kbps - 16 Mbps
Audio Compression:	G.711/G.726/MP2L2
Audio Bit Rate:	64 Kbps (G7.11) / 16Kbps (G.726) / 64Kbps (MP212)

IMAGE


Max. Image Resolution:	3072(H) x 2048(V)
Frame Rate:	High Frame Mode: Support 60Hz: 1 x fisheye (3072 x 2048, 25fps) or (2048 x 2048 30fps) or 4 x PTZ at (1024 x 768, 30fps) Multi-channel Mode: Support High Frame Mode: Support 60Hz: 1 x fisheye (1280 x 1280, 15fps) and 1 x panoramic (2048 x 1536, 15fps) and 3 x PTZ (1024 x 768, 15fps)
Number of Streams:	High Frame Rate Mode: 1 or 4 Multi-Channel: Up to 5 (No sub-streams)
Digital Noise Reduction:	3D DNR
Wide Dynamic Range:	Yes; Digital
Image Setting:	Saturation, Brightness, Contrast, Hue, Sharpness, AGC, White Balance
High Light Compensation:	Supported
Day/Night Switch:	Auto/Manual/Scheduled/Alarm Trigger

FUNCTIONS

Alarm Triggers:	Motion detection, Dynamic analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception
Local Storage:	Built-in Micro SD, SDXC card slot, up to 64GB
Security:	User Authentication, Watermark, IP address filtering, anonymous access
Protocols:	TCP/IP, HTTP, DHCP, DNS, DDNS, NTP, RTP, RTSP, PPPoE, SMTP, SNMP, HTTPS, FTP, ICMP, UPnP, IGMP, 802.1X, QoS, IPv6, Bonjour, RTCP
System Compatibility:	ONVIF, PSIA, CGI, ISAPI

PHYSICAL

Working Temperature:	-30°C - 60°C (-22°F - 140°F); Humidity 95% max
Protection:	IEC 60068-2-75 test, Eh, 50J, EN50102, EN50155, IP66
Weather Protection:	IK10
Dimensions (inches):	6.46" x 6.02" x 1.72"
Dimensions (mm):	164 x 152.8 x 43.8
Weight:	3.09 lbs. / 1400 g

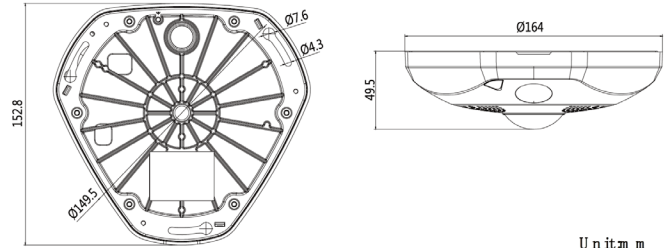

ELECTRICAL

Power Supply:	12V DC ±10%; PoE (802.3af)
Power Consumption:	12W Max

INTERFACE

Communication:	1 RJ45 10M/100M self-adaptive Ethernet port and 1 RS-485 interface
Audio Input:	1 - Channel Microphone Input, 3.5mm Mini-Jack & Built-in Microphone
Audio Output:	1 - Channel 3.5mm Audio Interface (Line Level 600Ω) & Built-in Speaker
Alarm Input:	1 channel signal input
Alarm Output:	1 channel signal relay output

WARRANTY

Three (3) Year Return to Depot Parts and Labor Warranty

CERTIFICATIONS

FCC, CE

PART NUMBER

VX-6M-360-IA6:	6MP Indoor/Outdoor Infrared IP 360 Camera
-----------------------	---

RECOMMENDED MOUNTS

VX-WM-360:	Wall Mount
VX-PM-360:	Pendant Mount
VX-SMJ-360:	Junction Box
VX-ISM-360:	Inclined Ceiling Mount
VX-PMC-360:	Pendant Mount Cap (ONLY)